

SH5.0/6.0RS

Residential Hybrid Single Phase Inverter



FLEXIBLE APPLICATION

- 80 V - 460 V wide battery voltage range
- Ideal for both retrofitting and new installations
- Built-in smart PID Zero function



ENERGY INDEPENDENCE

- Seamless transition to backup mode, for protection against power outages
- Fast Charging or discharging, enabling higher self-consumption results
- Built-in EMS with advanced customization



USER FRIENDLY SETUP


- Plug and play installation
- iSolarCloud monitoring available on App and Web
- Lightweight and compact, optimized for heat-dissipation




SMART MANAGEMENT

- Real time data (10 seconds refresh sample)
- 24/7 live online monitoring and with integrated display
- Online IV curve scan and diagnosis

CIRCUIT DIAGRAM

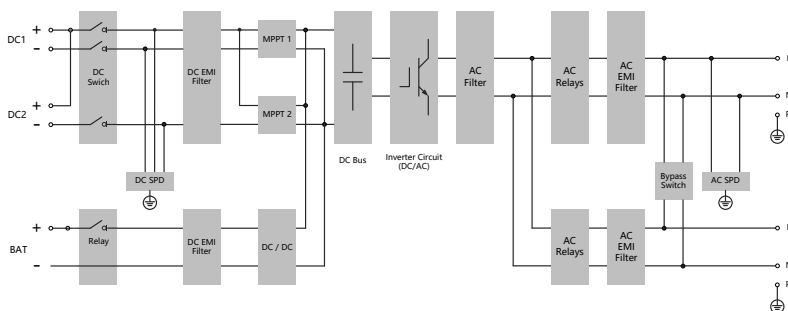

EFFICIENCY CURVE (SH6.0RS)

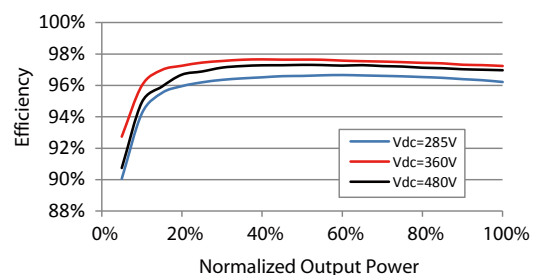

Type designation	SH5.0RS		SH6.0RS	
Input (DC)				
Recommended max. PV input power	12000 Wp		13000 Wp	
Max. PV input voltage *			600 V	
Min. PV input voltage / Startup input voltage			40 V / 50 V	
Rated PV input voltage			360 V	
MPPT operating voltage range **			40 V – 560 V	
No. of independent MPP trackers			2	
No. of PV strings per MPPT			1 / 1	
Max. PV input current			32 A (16 A / 16 A)	
Max. DC short-circuit current			40 A (20 A / 20 A)	
Max. current for input connector			20 A	
Battery data				
Battery type			Li-ion battery	
Battery voltage range			80 V - 460 V	
Max. charge *** / discharge current ***			30 A / 30 A	
Max. charge / discharge power			6600 W	
Input / Output (AC)				
Max. AC power from grid	12000 VA		13000 VA	
Rated AC output power	4999 W		6000 W	
Max. AC output apparent power	4999 VA		6000 VA	
Rated AC output apparent power	4999 VA		6000 VA	
Rated AC output current (at 230 V)	21.7 A		26.1 A	
Max. AC output current	22.7 A		27.3 A	
Rated AC voltage			230 V	
AC voltage range			154 V – 276 V	
Rated grid frequency			50 Hz / 60 Hz	
Grid frequency range			45 Hz – 55 Hz / 55 Hz – 65 Hz	
Harmonic (THD)			< 3 % (of rated power)	
Power factor at rated power / Adjustable power factor			> 0.99 at default value at rated power	
Feed-in phases / connection phases			1 / 1	
Backup data (on-grid mode)				
Max. output power for backup load ****			6000 W	
Max. output current for backup load *****			27.3 A	
Backup data (off-grid mode)				
Rated voltage			230V (± 2 %)	
Rated frequency			50 Hz / 60 Hz (± 0.2 %)	
THDV (@Linear load)			< 2 %	
Backup switch time			< 10 ms	
Rated output power	5000 W / 5000 VA		6000 W / 6000 VA	
Peak output power			8400 VA, 10 s	
Efficiency				
Max. efficiency / European efficiency			97.7 % / 97.3 %	
Protection & Function				
Grid monitoring			Yes	
DC reverse polarity protection			Yes	
AC short circuit protection			Yes	
Leakage current protection			Yes	
DC switch (solar)			Yes	
Surge protection			DC Type II / AC Type II	
PID Zero			Yes	
Battery input reverse polarity protection			Yes	
General data				
Topology (Solar / Battery)			Transformerless / Transformerless	
Degree of protection			IP65	
Dimensions (W * H * D)			490 mm * 340 mm * 170 mm	
Weight			18.5 kg	
Mounting method			Wall-mounting bracket	
Operating ambient temperature range			-25 °C – 60 °C	
Allowable relative humidity range			0 % – 100 %	
Cooling method			Natural convection	
Max. operating altitude			4000 m	
Noise (typical)			< 45 dB (A)	
Display			LED digital display & LED indicator	
Communication			RS485 / Ethernet / WLAN / CAN	
DI / DO			DI * 4 / DO * 1 / DRM	
DC connection type	MC4 (PV, Max.6 mm²) / Evo2 Compatible (Battery, Max.6 mm²)			
AC connection type *****	Plug and Play (Grid Max.16 mm², Backup Max.6 mm²)			
Grid compliance	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477-1, AS/NZS 4777.2:2020			
Country of manufacture	China			

* Input voltage exceeding the MPPT operating voltage range triggers inverter protection ** Please refer to the user manual for the full load MPPT voltage range *** Depending on the connected battery **** Please refer to the user manual and modify the settings based on actual load power ***** Calculated based on 220V grid voltage ***** AC Connector brand is Phoenix Contact and compatible brand. Country code needs to be set before grid connection

SH8.0 - 10RS

Residential Hybrid Single Phase Inverter



FLEXIBLE APPLICATION

- 200% DC/AC PV input 16A*4MPPTs
- Ideal for both new installation and retrofit scenario
- Built-in smart PID recovery function



SMART MANAGEMENT

- Real time data (10 seconds refresh sample)
- 24 / 7 live monitoring both online and with integrated display
- Online IV curve scan and diagnosis



ENERGY INDEPENDENCE

- Seamless transition to backup mode, for protection against power outages
- Fast Charging or discharging, enabling higher self-consumption results
- Built-in EMS with advanced customization



USER FRIENDLY

- Plug and play installation
- iSolarCloud monitoring available on App and Web
- Whole home backup available



Type designation	SH8.0RS	SH10RS
Input (DC)		
Recommended max. PV input power	16000 Wp	20000 Wp
Max. PV input voltage *	600 V	
Min. PV input voltage / Startup input voltage	40 V / 50 V	
Rated PV input voltage	360 V	
MPPT operating voltage range **	40 V – 560 V	
No. of independent MPP inputs	4	
No. of PV strings per MPPT	1 / 1 / 1 / 1	
Max. PV input current	64 A (16 A / 16 A / 16 A / 16 A)	
Max. DC short-circuit current	80 A (20 A / 20 A / 20 A / 20 A)	
Max. current for input connector	20 A	
Battery data		
Battery type	Li-ion battery	
Battery voltage range	80 V – 460 V	
Max. charge / discharge current	50 A *** / 50 A ***	
Max. charge / discharge power	10000 W / 10000 W	
Input and Output (AC)		
Max. AC power from grid	14500 VA	
Rated AC output power	8000 W	9999 W
Max. AC output apparent power	8000 VA	9999 VA
Max. AC output current	36.4 A	45.5 A
Rated AC voltage	1 / N / PE, 220 V / 230 V / 240V	
AC voltage range	154 V – 276 V	
Rated grid frequency	50 Hz / 60Hz	
Grid frequency range	45 Hz – 55 Hz / 55 Hz – 65 Hz	
Harmonic (THD)	< 3 % (at rated power)	
Power factor at rated power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / connection phases	1 / 1-N-PE	
Backup data (on grid mode)		
Rated output power for backup load	14500 W	
Rated output current for backup load	63 A	
Backup data(off-grid mode)		
Rated voltage	1 / N / PE, 220 V / 230 V / 240 V (± 2 %)	
Rated grid frequency	50 Hz / 60 Hz (± 2 %)	
Output voltage harmonic (THD)	< 2 %	
Switch time to emergency mode	< 10 ms	
Rated output power	8000 W / 8000 VA	9999 W / 9999 VA
Peak output power	13680 VA, 10 s	
Efficiency		
Max. efficiency / European efficiency	97.4 % / 96.8 %	97.5 % / 97.1 %
Protection & Function		
Grid monitoring	Yes	
DC reverse polarity protection	Yes	
AC short - circuit protection	Yes	
Leakage current protection	Yes	
DC switch (solar)	Yes	
Surge protection	DC type II / AC type II	
PID Zero	Yes	
Battery input reverse polarity protection	Yes	
AFCI	Yes	
IV scan aand diagnosis	Yes	
General data		
Topology (solar / battery)	Transformerless / Transformerless	
Degree of protection	IP65	
Dimensions (W * H * D)	605 mm * 435 mm * 181 mm	
Weight	29 kg	
Mounting method	Wall-mounting bracket	

Type designation	SH8.0RS	SH10RS
Operating ambient temperature range	- 25 °C – 60 °C	
Allowable relative humidity range (non-condensing)	0 % – 100 %	
Cooling method	Natural cooling	
Max. operating altitude	4000 m	
Noise (typical)	45 dB (A)	
Display	LED digital display and LED indicator	
Communication	RS485, WLAN, Ethernet, CAN	
DI / DO	DI * 1 / DO * 2 / DRM	
DC connection type	MC4 (PV) / Plug and play connector (battery)	
AC connection type	Plug and play connector	
Grid compliance	IEC 62109-1:2010, IEC 62109-2, IEC 62477-1, IEC 61000-6-1/-2/-3/-4, IEC 62920 EN 55011, CISPR 11, AS/NZS 4777.2:2020	
Country of manufacture	China	

* Input voltage exceeding the MPPT operating voltage range triggers inverter protection

** Please refer to the user manual for the full load MPPT voltage range

*** Depending on the connected battery



SH5.0/10RT

Residential Hybrid Three Phase Inverter



FLEXIBLE APPLICATION

- 150–600V wide battery voltage range
- Supports parallel connection with master-slave controlling
- Provides 100% power to unbalance loads in backup mode



SMART MANAGEMENT

- High self-consumption with optimised built-in EMS
- Free online monitoring to enhance energy management for end user, installer and retailer
- Remote firmware update and customisable settings



ENERGY INDEPENDENCE


- Seamless transition to backup mode for protection against power outages
- Fast charging / discharging to meet the demand of higher consumption




EASY INSTALLATION

- Unique push-in connectors for time-saving installation
- Touch free commissioning with smartphone
- Lightweight and compact

CIRCUIT DIAGRAM

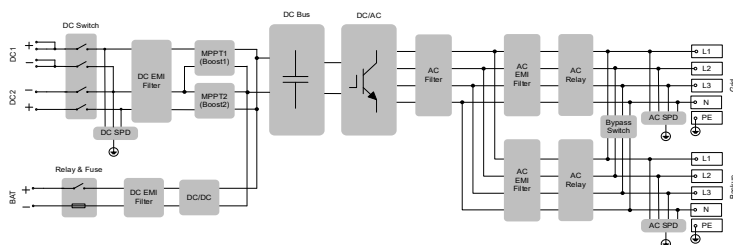

EFFICIENCY CURVE (SH5.0RT)

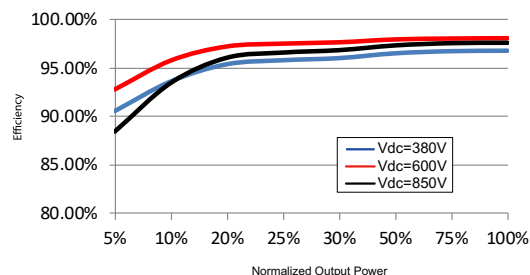

Type designation	SH5.0RT	SH10RT
Input (DC)		
Recommended max. PV input power	7500 W	15000 W
Max. PV input voltage		1000 V
Min. PV input voltage / Startup input voltage	150 V / 180 V	200 V / 250 V
Rated PV input voltage		600 V
MPP voltage range	150 V – 950 V	200 V - 950 V
MPP voltage range for rated power	210 V – 850 V	280 V - 850 V
No. of independent MPP inputs		2
No. of PV strings per MPPT	1 / 1	1 / 2
Max. PV input current	25 A (12.5 A / 12.5 A)	37.5 A (12.5 A / 25 A)
Max. DC short-circuit current	36A (18A / 18A)	54A (18A / 36A)
Max. current for input connector		30 A
Battery Data		
Battery type		Li-ion battery
Battery voltage		150V - 600V
Max charge / discharge current		30A * / 30A *
Max charge / discharge power	7500 W / 6000 W	10600 W / 10600 W
Input and Output (AC)		
Max. AC input power	11600 W	14000 W
Max. AC power from grid	12500 VA	20600 VA
Rated AC output power	5000 W	10000 W
Max. AC output apparent power	5000 VA	10000 VA
Rated AC output apparent power	5000 VA	10000 VA
Rated AC output current	7.3 A	14.5 A
Max. AC output current	7.6 A	15.2 A
Rated AC voltage	3 / N / PE, 220 / 380 V; 230 / 400 V; 240 / 415 V	
AC voltage range	270 - 480 V	
Rated grid frequency	50 Hz	
Grid frequency range	45 - 55 Hz	
Harmonic (THD)	< 3 % (of rated power)	
Power factor at Rated power / Adjustable power factor	>0.99 / 0.8 leading to 0.8 lagging	
Feed-in phases / connection phases	3 / 3-N-PE	
Backup Data		
Rated voltage	3 / N / PE, 220 Vac / 230 Vac / 240 Vac	
Total harmonic factor output voltage (Linear load)	2 %	
Switch time to emergency mode	<20 ms	
Rated output power	5000 W / 5000 VA	10000 W / 10000 VA
Peak output power **	6000 W / 6000 VA, 5 min 10000 W / 10000 VA, 10 s	12000 W / 12000 VA, 5 min
Rated output current for backup load during on grid mode	3 x 18.5 A	
Efficiency		
Max. efficiency / European efficiency	98.0 % / 97.2 %	98.4 % / 97.9 %
PV to Bat to Grid efficiency	> 94 %	
Protection & Function		
Grid monitoring	Yes	
DC reverse polarity protection	Yes	
AC short-circuit protection	Yes	
Leakage current protection	Yes	
DC switch (solar)	Yes	
DC fuse (battery)	Yes	
Surge Protection	DC Type II / AC Type II	
PID recovery function	Yes	
Parallel operation on grid port / Max. No. of inverters	Master-slave mode / 5 (need same inverters type)	
Battery input reverse polarity protection	Yes	
General Data		
Topology (solar / battery)	Transformerless / Transformerless	
Degree of protection	IP65	
Dimensions (W x H x D)	460*540*170 mm	
Weight	27 kg	
Mounting method	Wall-mounting bracket	
Operating ambient temperature range	-25 °C to 60 °C	
Allowable relative humidity range(Non-condensing)	0% - 100%	
Cooling method	Natural convection	
Max. operating altitude	4000 m	
Noise (Typical)	30 dB(A)	
Display	LED	
Communication	RS485, WLAN, Ethernet, CAN, 4 × DI, 1 × DO	
DC connection type	MC4 (PV) / Sunclix (Battery)	
AC connection type	Plug and play connector	
Compliance	IEC / EN 62109, IEC / EN 61000-6, EN 62477-1, IEC 61727, IEC 62116, IEC 61683, VDE-AR-N-4105, AS/NZS 4777.2:2020, EN50549-1, NRS 097-2-1, TOR Generator Type A	
Country of manufacture	China	

* Depending on the connected battery

** Can be reached only if PV and battery power is sufficient.

SH15/20/25T

Hybrid Three Phase Inverter



FULL BACKUP

- Built-in 63 A bypass for whole home backup
- 10 ms seamless switch
- Peak output up to 36500 VA (10 s) in backup mode (SH25T)



FLEXIBLE APPLICATION

- Support 100 % unbalance output in backup and on grid mode
- Max. 16 A DC input current per string
- 50 A fast charge / discharge current



FRIENDLY INSTALLATION

- Plug & Play installation
- Quiet operation for indoor or outdoor installation



SAFE AND DURABLE

- Support precise AFCI
- IP65/C5



Type designation	SH15T	SH20T	SH25T
Input (DC)			
Recommended max. PV input power	30000 Wp	40000 Wp	50000 Wp
Max. PV input voltage *		1000 V	
Min. PV input voltage / Startup input voltage		150 V / 180 V	
Rated PV input voltage		600 V	
MPPT operating voltage range **		150 V - 950 V	
No. of independent MPP trackers		3	
No. of PV strings per MPPT		2 / 2 / 1	
Max. PV input current		80 A (32 A / 32 A / 16 A)	
Max. DC short-circuit current		100 A (40 A / 40 A / 20 A)	
Max. current for input connector		30 A	
Battery data			
Battery type		Li-ion battery	
Battery voltage range		100 V - 700 V	
Max. charge / discharge current ***		50 A / 50 A	
Max. charge / discharge power	30000 W / 15000 W	30000 W / 20000 W	30000 W / 25000 W
Input and Output (AC)			
Max. AC power from grid ****		43000 VA	
Rated AC output power	15000 W	20000 W	25000 W
Max. AC output apparent power	15000 VA	20000 VA	25000 VA
Max. AC output current	22.8 A	30.4 A	37.9 A
Rated AC voltage		3 / N / PE, 220 V / 380 V ; 230 V / 400 V; 240 V / 415 V	
AC voltage range		270 V - 480 V	
Rated grid frequency		50 Hz / 60 Hz	
Grid frequency range		45 Hz - 55 Hz / 55 Hz - 65 Hz	
Harmonic (THD)		< 3 % (of rated power)	
Power factor at rated power / Adjustable power factor		> 0.99 / 0.8 leading to 0.8 lagging	
Feed-in phases/connection phases		3 / 3-N-PE	
Backup data (on grid mode)			
Max. output power for backup load ****		43000 W	
Max. output current for backup load		3 * 63 A	
Backup data (off-grid mode)			
Rated voltage		3 / N / PE, 220 / 380 V; 230 / 400 V; 240 / 415 V (± 2 %)	
Rated frequency		50 Hz / 60 Hz (± 0.2 %)	
THDV(@Linear load)		< 2 %	
Backup switch time		< 10 ms	
Rated output power	15000 W / 15000 VA	20000 W / 20000 VA	25000 W / 25000 VA
Peak output power *****	25500 W / 25500 VA , 10 s	32000 W / 32000 VA , 10s	36500 W / 36500 VA , 10 s
Efficiency			
Max. efficiency / European efficiency		98.1 % / 97.6 %	98.2 % / 97.8 %
Protection & Function			
Grid monitoring		Yes	
DC reverse polarity protection		Yes	
AC short-circuit protection		Yes	
Leakage current protection		Yes	
DC switch (solar)		Yes	
Surge protection		DC Type II / AC Type II	
PID zero		Yes	
Battery input reverse polarity protection		Yes	
General data			
Topology (solar / battery)		Transformerless / Transformerless	
Degree of protection		IP65	
Dimensions (W * H * D)		620 mm * 480 mm * 245 mm	
Weight	38 kg		40 kg
Mounting method		Wall-mounting bracket	
Operating ambient temperature range		-25 °C - 60 °C	
Allowable relative humidity range(Non-condensing)		0 % - 100 %	
Cooling method		Natural convection	Fan cooling
Max. operating altitude		2000 m	
Noise(Typical)		35 dB (A)	50 dB (A)
Display		LED	
Communication		RS485, WLAN, Ethernet, CAN	
DI / DO		DI * 4 / DO * 2 / DRMO	
DC connection type		MC4 compatible connector (PV, Max.6 mm ²)/Plug and play connector (battery, Max.10 mm ²)	
AC connection type		Plug and play connector (Max.16 mm ²)	
Compliance		IEC / EN 62109, IEC 61000-6, EN 62477-1, IEC 61727, IEC 62116, IEC 62920, EN 55011, CISPR 11, VDE-AR-N-4105, EN 50549-1, NRS 097, AS/NZS 4777.2:2020, TOR Type A, R25, CEI 0-21	
Country of manufacture		China	

* Input voltage exceeding the MPPT operating voltage range triggers inverter protection

** Please refer to the user manual for the full load MPPT voltage range

*** Depending on the connected battery

**** Please refer to the user manual and modify the settings based on actual load power

***** Can be reached only if PV and battery power is sufficient

